

775-PC

Industrial dust and waterproof luminaires

Equipped with **LED modules**. 775-PC is available in the following sizes: 2x600mm, 1x1200mm, 1x1500mm, 2x1200mm, 2x1500mm

YOUR MAIN BENEFITS:

A professional luminaire for wide usage, that fulfils the strongest quality requirements. Especially for applications, where **high impact resistance (IK rating)** is required. Available in IP65 (or optionally also IP66 or IP67).



775-PC



IP65



Option:

IP66

IP67



FIELD OF APPLICATION:

Due to the construction principles of gasket, closing system and diffuser our fixtures ensure a high grade of protection (IP65 or IP66) against dust, contamination and water permeation. (Optionally available in IP67). In accordance with their IP-grade they can be used widely to illuminate spaces with dusty and humid environment. Thanks to its **enhanced impact resistance**, 775-PC is especially suitable for applications, where **a high IK impact rating** is required.

When using outdoors, the fittings should be protected against direct sunlight and adverse weather conditions. Under 0°C the application of venting cable gland is necessary, as well as silicone gasket is strongly recommended.

TECHNICAL DESCRIPTION AND BENEFITS:

- **Housing:** It is made of flame retardant **injection moulded polycarbonate (PC)** (suitable for 850°C glow wire test), in light grey (RAL7035) colour. This material has very high mechanical strength and allows us to reach an excellent shock resistance.

- The **diffuser** is available in the following versions:
Injection moulded polycarbonate (**PC**), **opal**, with high shock resistance – up to IK10, with extremely high light permeability and well-balanced light dispersing.
As an option injection moulded acrylic (PMMA) diffuser in opal version is available.

The diffusers are designed with respect to their optical characteristics and are **UV resistant**.

- The **gasket** between the diffuser and the housing is available in two versions:
 - **Injected silicone-based endless foam**
 - **Non-aging PU** (polyurethane) **endless foam**
- **Fixing of the diffuser to the body:** with highly resistant clips made of **stainless steel** (standard or tamper-proof).
- **Gear tray** (reflector): White powder coated steel sheet according to **Zhaga** standards or customised.
- **Electrical components:** in accordance with the requested specification suitable for LED technology. For more details please see technical data.

Main technical options

Our new opal diffuser has an **outstanding light transmissivity of more than 90%**. With this great light permeability, it is an **excellent choice for luminaires equipped with LED modules**.



LED

The opal diffusers are made of UV stabilized **opalised** material, specially developed for LED applications. This ensures among others a well-balanced light distribution and the **elimination of glare**. Moreover the diffuser made of injection moulded polycarbonate (PC) excels at highest **impact resistance of IK10**.


775-PC

The special tamper-proof stainless steel clips for **non-SELV (HV)** solutions can not be released with bare hands.

Usual stainless steel clips for **SELV** (Safety Extra Low Voltage) solutions.



The gear tray is made of white powder coated steel sheet according to **Zhaga** standards. On request customisation possible.

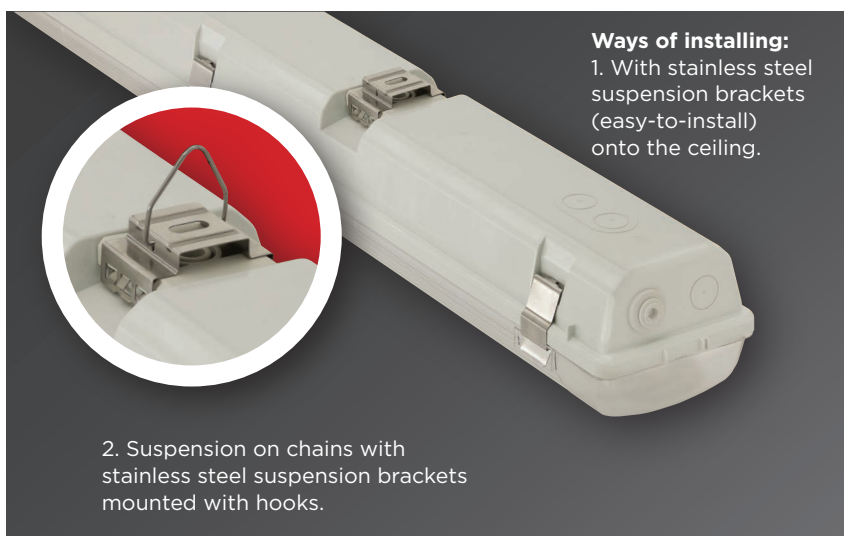

Ways of installing:
1. With stainless steel suspension brackets (easy-to-install) onto the ceiling.

2. Suspension on chains with stainless steel suspension brackets mounted with hooks.

In order to ensure **maximum heat**, chemical and weather **resistance** even under tough conditions, the **gasket** between the diffuser and housing is made of **silicone-based** foam with enhanced resistance.




CLO

Light sources suffer from degradation in light output over time. **The CLO feature enables LED solutions to deliver constant lumen output through the life of the light engine.**

Further accessories:

1. cable gland
2. rapid connector
3. circular connector system

Different connectors enabling the electrical connection **without disassembling** the luminaire, thus **avoiding** a potential damage of the LED's inside the luminaire through **electrostatic discharge (ESD)**.

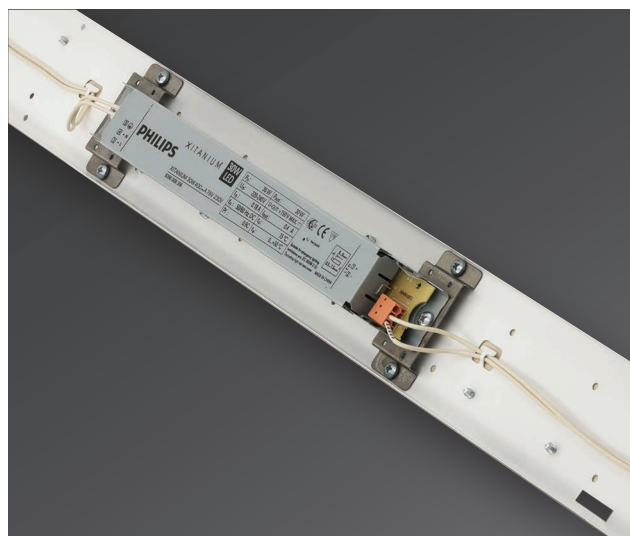

Depending on customer requirements we can reach different levels of luminous flux (lumen) as well as luminous efficacy (lm/Watt) of our LED luminaires. For more details please see technical data.

In order to optimise the thermal management of the luminaire we avoid the direct contact of the gear tray and driver, thus increasing the lifetime of the modules and driver.

Technical data (extract)

* EPREL database is available at <https://eprel.ec.europa.eu/screen/product/lightsources/xxxxxxx>
(where the xxxxxx have to be substituted by the reference number given in the last column)

Products with 5 years warranty	Power (W)	Lum. total luminous flux emitted (lm)		Lum. efficacy (lm/W)		CCT (Kelvin)	CRI	Lifetime L70B50 (Ta=35°C)	Lifetime L80B10 (Ta=35°C)	A (mm)	B (mm)	Weight (kg)	EEL	Light source* (reference)
		PMMA	PC	PMMA	PC									

Lumnum EU 130 with Osram driver

775 2ft (2x600mm)**	24	3300	3000	137	125	4000	>80	>72 000 h	>50 000 h	669	360	0,9	D	1059419
775 4ft (1200mm)	25	3400	3200	136	130	4000	>80	>72 000 h	>50 000 h	1277	700	2,2	D	802364
775 5ft (1500mm)	30	4200	4000	140	133	4000	>80	>72 000 h	>50 000 h	1577	1000	2,5	D	734821
775 4ft (1200mm)	38	5100	4900	134	129	4000	>80	>72 000 h	>50 000 h	1277	700	2,2	D	734862
775 5ft (1500mm)	51	7000	6600	137	129	4000	>80	>72 000 h	>50 000 h	1577	1000	2,5	D	734813

Lumnum EU PRO 160 with Osram driver

775 4ft (1200mm)	22	3300	3200	150	145	4000	>80	>72 000 h	>50 000 h	1277	700	2,2	C	803878
775 5ft (1500mm)	27	4200	4000	155	148	4000	>80	>72 000 h	>50 000 h	1577	1000	2,5	C	734800
775 4ft (1200mm)	31	4800	4600	155	148	4000	>80	>72 000 h	>50 000 h	1277	700	2,2	C	803933
775 5ft (1500mm)	41	6500	6200	158	151	4000	>80	>72 000 h	>50 000 h	1577	1000	2,5	C	734760

Lumnum EU PRO 140 HF with Philips driver

775 4ft (2x1200mm)**	58	8000	7500	138	129	4000	>80	>72 000 h	>50 000 h	1277	700	2,65	D	734708
775 5ft (2x1500mm)**	73	10200	9600	140	131	4000	>80	>72 000 h	>50 000 h	1577	1000	3	D	734742

Osram Basic Linear G3

775 2ft (2x600mm)**	21	2400	2300	119	112	4000	>80	>50 000 h	>41 000 h	669	360	1,3	D	892178
775 4ft (1200mm)	23	2900	2800	124	119	4000	>80	>50 000 h	>50 000 h	1277	700	1,8	D	892186
775 5ft (1500mm)	28	3700	3500	132	126	4000	>80	>50 000 h	>50 000 h	1577	1000	2,2	D	892176 892186
775 4ft (1200mm)	28	3900	3700	140	134	4000	>80	>50 000 h	>45 000 h	1277	700	2	D	892188
775 5ft (1500mm)	35	4700	4500	136	130	4000	>80	>50 000 h	>50 000 h	1577	1000	2,2	D	892178 892188
775 4ft (2x1200mm)**	39	5300	5000	135	127	4000	>80	>50 000 h	>43 000 h	1277	700	2,5	D	892188
775 5ft (2x1500mm)**	47	6800	6400	144	136	4000	>80	>50 000 h	>43 000 h	1577	1000	2,7	D	892178 892188

Philips Fortimo LED Strip LV5

775 2ft (2x600mm)**	15	2100	2000	138	131	4000	>80	>72 000 h	>50 000 h	669	360	1,7	C	778312
775 4ft (1200mm)	31	4500	4300	143	136	4000	>80	>72 000 h	>50 000 h	1277	700	2,2	C	778351
775 5ft (1500mm)	38	5400	5200	142	136	4000	>80	>72 000 h	>50 000 h	1577	1000	2,5	C	778365
775 5ft (2x1500mm)**	49	6900	6500	140	128	4000	>80	>72 000 h	>50 000 h	1577	1000	2,7	C	778365

Philips Fortimo LED Strip HV6

775 4ft (2x1200mm)**	56	8300	7800	150	141	4000	>80	>100 000 h	>64 000 h	1277	700	2,65	C	893529
775 5ft (2x1500mm)**	70	10500	9900	150	141	4000	>80	>100 000 h	>64 000 h	1577	1000	3	C	893525 893529
775 4ft (2x1200mm)**	66	10000	9400	153	144	4000	>80	>100 000 h	>64 000 h	1277	700	2,65	C	893537
775 5ft (2x1500mm)**	83	12700	12000	153	145	4000	>80	>100 000 h	>64 000 h	1577	1000	3	C	893533 893537

** The LED strips are placed in one line in a twin (wider) housing.


Calculated values based on the available datasheets

Further options:

On request:



Schematic drawing with main dimensions

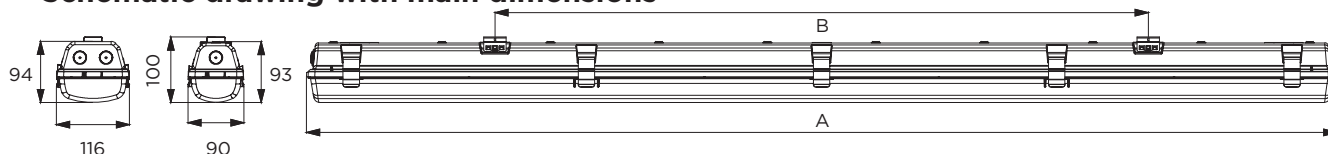



Photometric curves:

775-PC, 4ft (2x1200mm)

Osram Basic Linear G3, 39W, 5000lm, PC

775-PC, 4ft (2x1200mm)

Philips Fortimo LED Strip HV6, 55W, 7800lm, PC

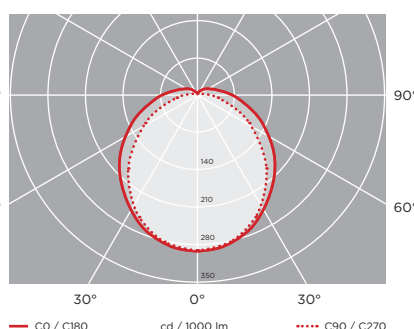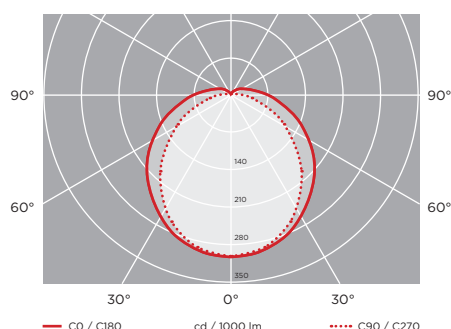

Luminaire customisation and the options of advanced controls are presented on page 5